

GREEN/SERIES



PATENTED MIXED ROTOR



ECO MIXED CHIPS



BIO DEGRADABLE LUBRICANT



180° ADJUSTABLE CHIMNEY




PILOT SYSTEM



ELECTRIC CONTROL

VERSATILE, PRACTICAL, LIGHTWEIGHT AND POWERFUL

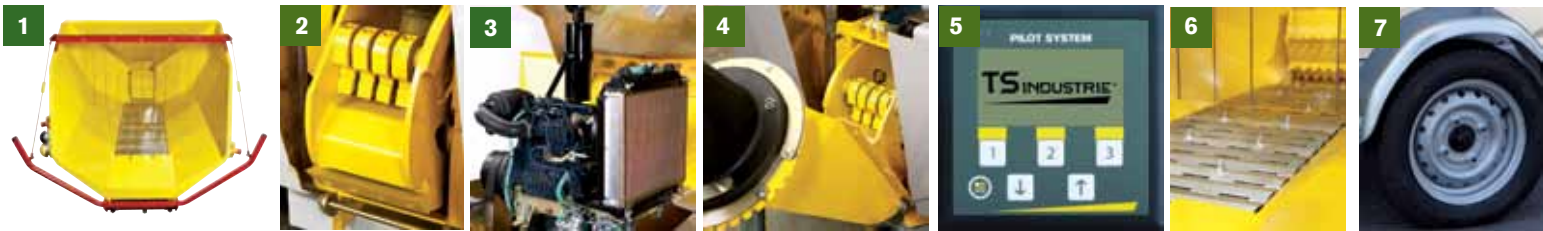

1 - ENLARGED HOPPER WITH FEED BELT – width 40 cm

2 - PATENTED MIXED ROTOR
with 8 hammers with replaceable heads and 2 cutting blades

3 - DIESEL ENGINE MODEL 3-cyl. 25 HP water-cooled Kubota diesel engine

4 - EASE OF ACCESS to the rotor for maintenance

5 - PILOT SYSTEM Combined machine control and monitoring

6 - FEED BELT
A 40 cm wide feed belt with teeth to ensure enhanced feed of fine material

7 - TYRES filled with preventative sealant

TECHNICAL DATA

Product code	GSTIGER25D	No of axles	1/1150 kg
Engine	KUBOTA D902 25 HP/18,5 kW	Allowable road weight axles	
Engine swept volume cm3	898 3-Cyl.	Tyre dimensions	155/70R13
Fuel	Diesel	Tank capacity	17 L
Clutch	Centrifugal clutch	Consumption	3 L/h
Cowling	Polyester resin security housing	Multidirectional chimney	180°
Admissible diameter	14 cm	Chimney outlet height	1850 mm
Output	17 m3/h	Machine weight	745 kg
Rotor diameter	400 mm	MMTA trailer approval	750 kg
Rotor weight	45 kg	Hopper dimensions (LxW)	1600 x 1350 mm
Hammers	8	Hopper loading height	750 mm
Knives	2	L x W x H	3560 x 1515 x 2060 mm
Feed roll width	250 mm		
Feed conveyor	400 mm		
Feed roll diameter	340 mm		