

NEW



GREEN/SERIES



PATENDED MIXED ROTOR



ECO MIXED CHIPS



BIO DEGRADABLE LUBRICANT



PILOT SYSTEM



HYDRAULIC CLUTCH





ELECTRIC CONTROL



270 ° ADJUSTABLE CHIMNEY

SIMPLE TO LOAD AND SAFE FOR OUTSTANDING EASE OF USE

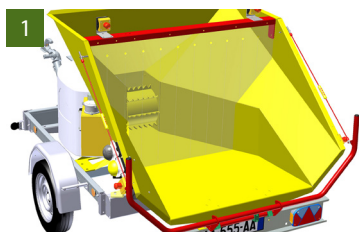

1 - WIDE AND EASILY ACCESSIBLE FEED HOPPER with transparent curtain
2 - PATENTED MIXED ROTOR with 10 hammers with replaceable heads and 2 cutting blades

3 - HYDRAULIC SAFETY CLUTCH :
 Thermal safety 180°

4 - HYDRAULIC OIL FLOW DIVIDER

TECHNICAL DATA

Product code	GSPREMIUM25P	Feed roll diameter	340 mm
Engine	KOHLER CH730 25 CV/18,5 kW	No of axles - Allowable road weight axles	1/1300 kg
Engine swept volume cm3	725 2-cyl	Tyres dimensions	155/70R13
Fuel	Petrol	Tank capacity	30 L
Clutch	Hydraulic clutch	Consumption	4,5L/h
Cowling	ABS safety hoods	Multidirectional chimney	270°
Admissible diameter	13 cm	Chimney outlet height	2060 mm
Output	13 m3/h	Machine weight	745 kg
Rotor diameter	560 mm	MMTA trailer approval	750 kg
Rotor weight	85 kg	Hopper dimensions (LxW)	1500 x 1390 mm
Hammers	10	Hopper loading height	715 mm
Knives	2	L x l x H	3770 x 1600 x 2140 mm
Feed roll width	250 mm		
Feed conveyor	No		